




Light efficiency:



Light quality:



Color temperature:



**Output: 258 lm**  
**Peak: 1307 cd**  
**Power: 12.3 W**  
**PF: 0.60**

4 PLANES




Product name:  
**MEDI-O RGBA Full Green Medium**

Date and time:  
**5/12/2021 1:48:53 PM**

Item number:  
**NA**

Minimum order quantity:  
**NA**

Additional information:  
**Ludicrous Mode Full Green Medium**

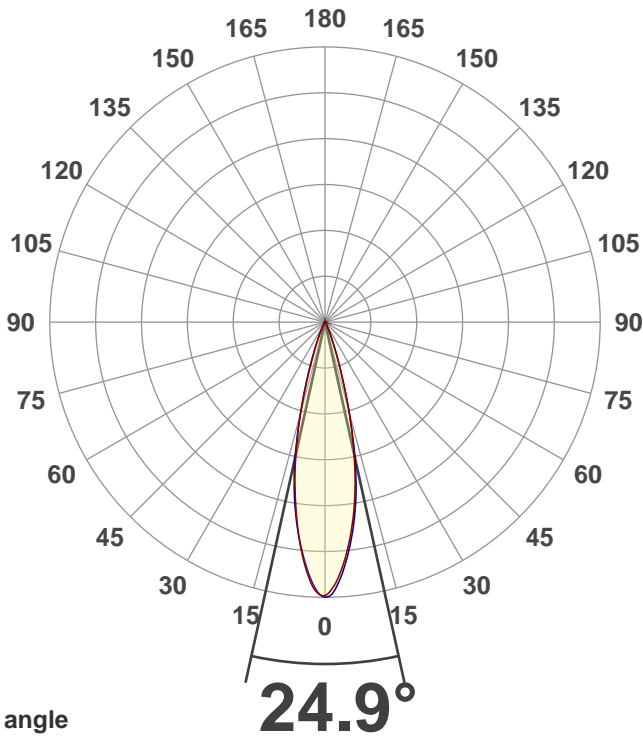



Beam angle


Color




CIE1931  
x: 0.163  
y: 0.701

Spectra

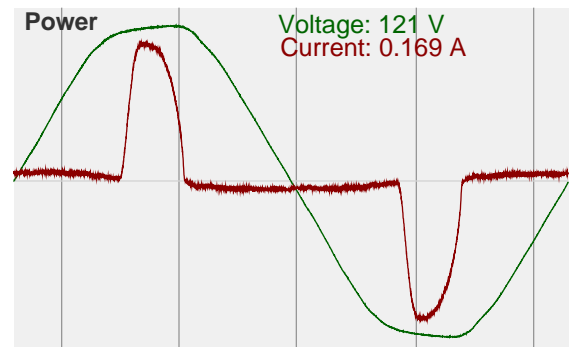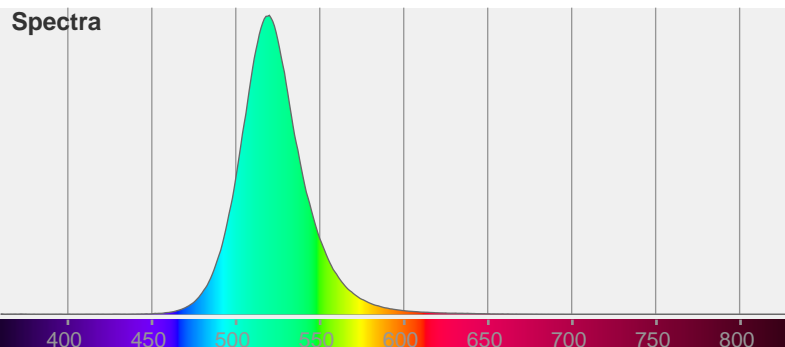


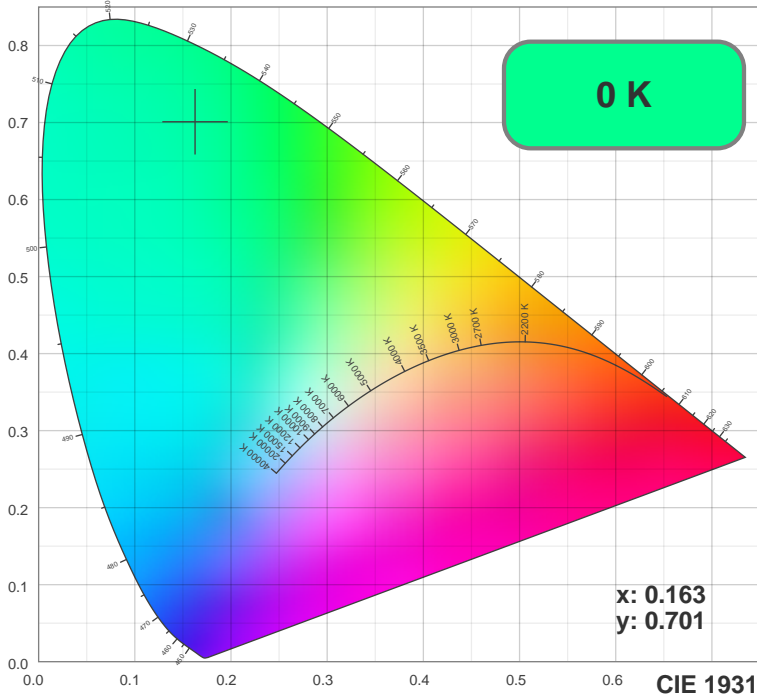


TM30: 0.0

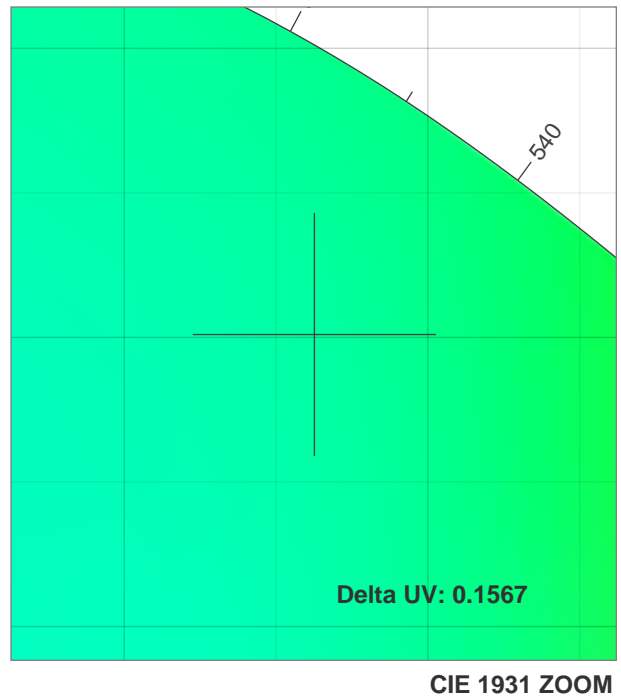

CIE 1931 ZOOM

CRI: 0.0 (R1-R8)

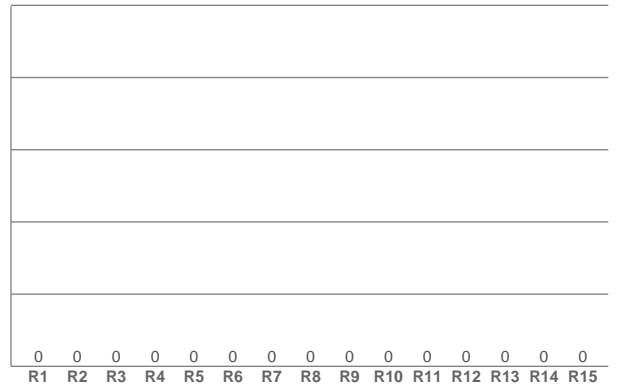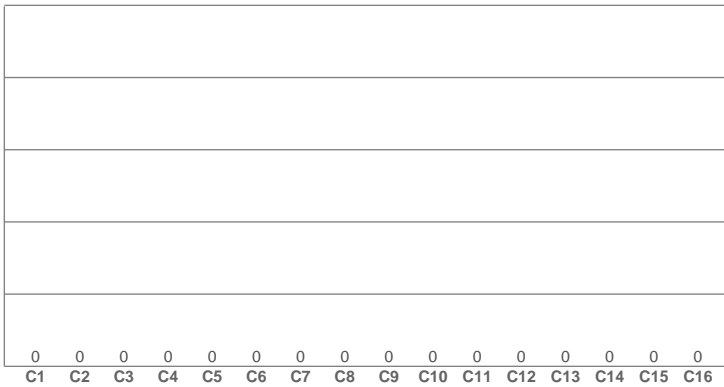

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

CQS: 0.0

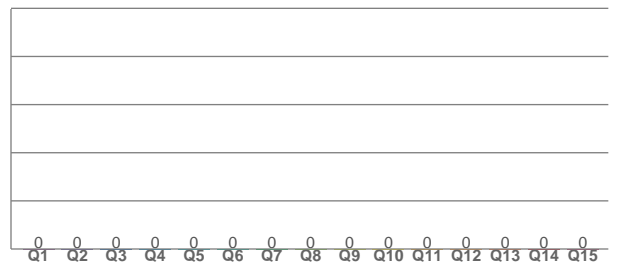

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
0 K	0.0	0.0	0.0	0.0	0.0	0.2	0.7	0.1	0.4	NaN

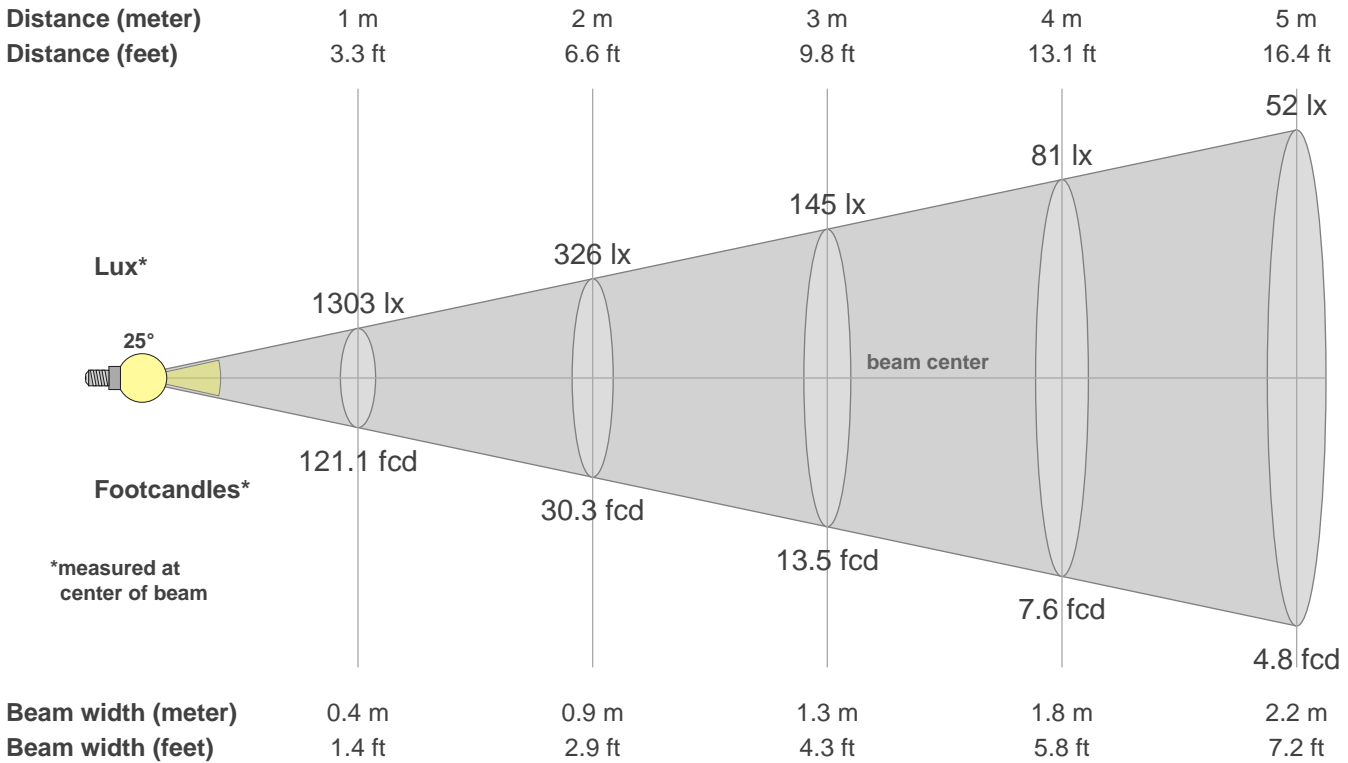

**Intensities in 0° c-plane**

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1303	1258	1173	1070	953	822	677	524	373	241	147	90	56	36	24	17	13	10	7	6
100%	96%	90%	82%	73%	63%	52%	40%	29%	19%	11%	7%	4%	3%	2%	1%	1%	1%	1%	0%

**Intensities in 90° c-plane**

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1303	1277	1197	1094	979	849	697	530	369	240	150	92	57	36	24	17	13	10	8	6
100%	98%	92%	84%	75%	65%	54%	41%	28%	18%	12%	7%	4%	3%	2%	1%	1%	1%	1%	0%

**Intensities in 180° c-plane**

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1303	1280	1200	1089	959	821	677	528	387	261	168	105	65	42	29	21	16	12	9	8
100%	98%	92%	84%	74%	63%	52%	40%	30%	20%	13%	8%	5%	3%	2%	2%	1%	1%	1%	1%

**Intensities in 270° c-plane**

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1303	1268	1186	1082	968	841	699	533	373	245	155	96	60	38	25	17	13	10	8	7
100%	97%	91%	83%	74%	65%	54%	41%	29%	19%	12%	7%	5%	3%	2%	1%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
24.9°	41.4°	53.5°	99.3%	98.0%